




GUITAR SUPPORT HARNESS™

Set Up Instructions

1. Begin by bending the top half of the shoulder pads to the general shape of your shoulder. Many people find that bending the shoulder pad around their leg gives a good result (A). Once you have the general shape (B), it can be fine tuned later with the help of a friend for any final adjustments.





2. With the harness hanging from your shoulders, fasten the belt portion with the quick disconnect (C) and position it so that it sits at the base of your sternum. (D) The length of the belt portion is fully adjustable by taking up the slack through the quick disconnect buckle (E) and securing the end with the triglide (F). If there is too much webbing left over, it can be carefully trimmed with sharp scissors and the end seared with a match or lighter to prevent fraying. You will want the belt to be snug, but not too restrictive for your breathing.

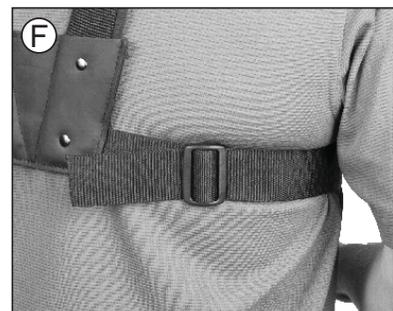

3. To adjust the length of the neck strap, simply grasp the webbing tab at the shoulder position quick disconnect and pull it downward (G). This adjustment can be made on both sides. This allows for an extremely wide range of possible adjustments. To lengthen the strap, simply lift the ladder-lock connector at the shoulder position (H) and gently pull the hook downward again.



4. The adjustable support strap (J) attaches to the back of your guitar. The length adjust to the distance between the front and back strap pins, and the hook receiver (K) snaps to one of twelve positions to balance the instrument from neck to body.

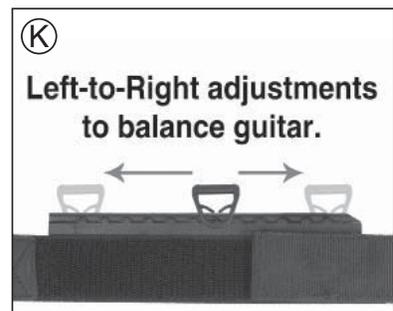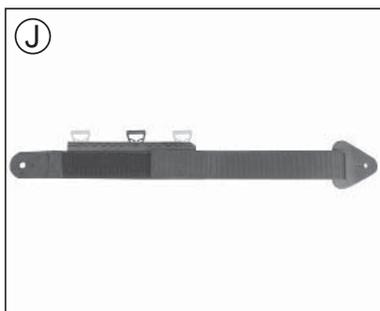

continued on back side

5. Unfasten the hook-and-loop connector on the adjustable support strap to make it easier to apply to the back of the instrument (L).



6. The narrower leather connector fastens to the strap pin at the neck end of the instrument (M). Make certain the receiver hook with balancing mechanism is toward the top of the instrument.



7. Apply the wider triangular leather connector to the pin at the base of the instrument (N).



8. Pull the strap taut (P) and double the strap back (Q) for a snug fit. Press the hook and loop connector against the strap to secure it in place.




9. When you're ready to play attach the hook on the harness to the hook receiver (R) on the adjustable support strap.



10. Test the balance of the instrument (S) If you find the instrument to be neck heavy or body heavy, the receiver hook on the adjustable support strap can be moved to another position to help achieve a good balance.



11. To move the hook receiver press it downward then slide from left to right to the desired position (T). When released the hook receiver locks into position.

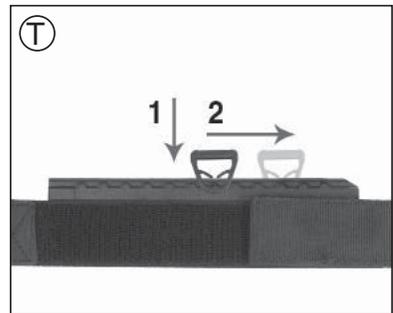

a division of

OP/TECH USA®

www.neotechstraps.com

800-251-7815